

EX-2C SFC Topcoat

Technical Data Sheet (TDS)

Product Description

EX-2C SFC Topcoat is a flexible, two component, highly cross-linked, high performance polyester polyurethane coating providing a high gloss surface finish. **EX-2C SFC Topcoat** is ideal for when flexibility and impact resistance are required features.

Product features:

- Superior flexibility for flexible substrates
- Excellent gloss retention
- Outstanding chemical resistance
- Outstanding abrasion resistance
- Outstanding impact resistance
- A library of over 40,000 colors

Recommended Uses

EX-2C SFC Topcoat is intended for industrial applications; either new build or maintenance. EX-2C SFC Topcoat is to be used for finishing or refinishing very flexible substrates or when impact resistance and coating flexibility are required.

Industries:

- Oilfield & Energy Services
 - Well Service Vehicles
 - Drilling
 - Tanks
- Cranes and Construction Equipment
- Waste and Recycling Industry
 - Garbage Trucks
- Trailers and Rolling Stock

Mix Ratio

1 part by volume of component A **[CLRXXXXX]**
(Part Number varies with color)
1 part by volume of component B **[FUB0100]**

The recommended temperature when mixed is 68-77°F (20-25°C).

NOTE: Other EX-2C B components are available for different ambient conditions and application requirements
See: Component B Selector

Please contact your Endura Representative if you have any questions.

Product Characteristics

Gloss:	High: 90+ GU at 60°
Slight gloss variations will occur depending on color. Lower gloss levels of EX-2C SFC Topcoat are available	
Volume Solids Mixed: (Unreduced) Using Comp B FUB0100	46% ± 4%
Volume solids will vary by color	
Pot Life: (77°F (25°C) and 50% RH)	8-10 Hours
Note: Pot life is reduced when Super Catalyst II is used	
VOC Mixed (Unreduced): EPA Method 24 White 120: Comp B FUB0100	468 g/l 3.915 /gal
VOC content will vary with each color and specific Component B used	
Shelf Life:	
Component A	3 years
Component B	2 years
For unopened product (77°F (25°C))	

Surface Preparation

EX-2C SFC Topcoat can be applied over all Endura primer sealers and primer surfacers without sanding during their topcoat window. The topcoat window varies with each primer. See the relevant primer technical data sheet for the specific topcoat window data.

If the primer topcoat window has been surpassed; the primer should be sanded with 240 – 280 grit sandpaper to achieve inter-coat adhesion. All sanding dust must be blown off prior to application of the topcoat.

Application Method

EX-2C SFC Topcoat can be applied using most spray painting systems.

EX-2C SFC Topcoat

Technical Data Sheet (TDS)

Solid Colors:

Apply two single wet coats allowing up to 30 minutes flash time between coats. It is recommended that a thinner first coat be applied at 1.5 – 2.0 mils wet, followed by a second wet coat of 2.0 - 3.5 mils wet. Allow up to 30 minutes between coats.

Metallic Colors:

Three coats are recommended for metallic colors. Apply two medium coats. Allow up to 30 minutes flash off time between coats. Immediately following the second wet coat apply a third “mist coat” to achieve a uniform finish.

Masking tape should be removed as soon as the paint has dried sufficiently to be “tacky”. If the paint is allowed to cure, the tape will be difficult to remove, and jagged edges could occur.


Note: Ensure that any solvent absorbent primer surfacers are properly sealed with a primer sealer prior to application of the topcoat.

Note: When a high-hide version of any solid or metallic color is used, it must be clear coated to realize full gloss and UV stability.

Spray Gun Setup

Feed Type	Fluid Tip	Application Pressures (heel of gun)	Fluid Delivery
Siphon Feed	1.6-1.8 mm	40-50 psi	
Gravity Feed	1.3-1.4 mm	30-40 psi	
Pressure Feed	1.0-1.8 mm	50-60 psi	10-14 oz/min
Air Assist Airless	9-13 Thou	1,000-1,800 psi	
Airless	9-13 Thou	1,700-3,000 psi	

Spray Viscosity

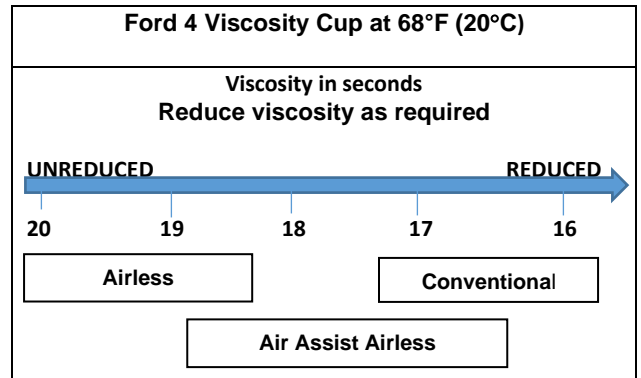

Note: Spraying viscosity and thinning will depend on ambient conditions, spray equipment used and the desired surface finish.

If required, recommended spraying viscosity is achieved by reducing with one of the desired Endura topcoat thinner/reducers

with FTH0086 – EX-2C Thinner / Reducer
with FTH0090 – Slo EX-2C Thinner /Reducer
with FTH0014 – Medium Topcoat Reducer

Film Build

EX-2C SFC Topcoat has a recommended film build thickness of:

Wet: WFT	3.5 – 5.5 mils	89 – 140 microns
Unreduced		
Dry: DFT	1.5 – 2.5 mils	38 – 63 microns

Note: With poor hiding colors film build may be higher.

Theoretical coverage at 1.0 mil (25 microns)
Average DFT (Spray): 765 ft² per gallon at 100% transfer efficiency.

EX-2C SFC Topcoat

Technical Data Sheet (TDS)

Dry Times

	68°F (20°C)	86°F (30°C)	104°F (40°C)
Dust Free	3 Hours	2 Hours	1 Hour
Full Cure	7-9 Days	5-6 Days	3-4 Days

Note: Dry Times are subject to ambient conditions (temperature and humidity), good airflow and film build of the topcoat.

Note: The use of Super Catalyst II with Endura topcoats will accelerate drying times.

Clear coat application time:

Solid colors: Minimum 3 hours
Metallic colors: Minimum 6 hours

Note: The recoat or clear coat times are based on based on recommended film build at 68°F (20°C) and 50% RH.

For questions about scheduling please contact your Endura Representative.

For best results, surface temperature must be 86°F (30°C) or less before topcoating.

Maximum re-coat window without sanding is 18 hrs at 68°F (20°C). After 18 hours EX-2C SFC Topcoat must be sanded to achieve inter-coat adhesion.

Note: Metallics and pearls must be topcoated within this re-coat window as sanding not recommended.

Recommended 220 – 320 grit mechanical sanding before topcoating.

Important Note: Ensure that no more than three coats of paint are applied in a 12-hour shift. This includes primer, mid-coat, topcoats and clear coat. If more than three coats have been applied wait 10-12 hours to allow for proper solvent evaporation.

For questions about scheduling please contact your Endura Representative.

Component B Selector

EX-2C Low VOC B – For use when VOC compliance is required.

1 part by volume of component A [CLRXXXXX]
1 part by volume of component B [FUB0112]

For questions regarding which component B is right for your application, contact your Endura Representative.

Clean Up

Clean all equipment immediately after use with Endura High Strength Gun Wash, or Endura EX-2C thinner.

Follow manufacturer's safety recommendations when using any solvent.

Ordering Information (sizing)

Available in Pints, Quarts, Gallons, 5 Gallon Pails
Other custom sizes may be available.

1 Mixed Quart		
Comp A Part numbers vary by color	CLRXXXXX-010	1 Pt.
Comp B	FUB0100-010	1 Pt.

2 Mixed Quarts		
Comp A Part numbers vary by color	CLRXXXXX-020	1 Qt.
Comp B	FUB0100-020	1 Qt.

2 Mixed Gallons		
Comp A Part numbers vary by color	CLRXXXXX-030	1 Gal.
Comp B	FUB0100-030	1 Gal.

EX-2C SFC Topcoat

Technical Data Sheet (TDS)

10 Mixed Gallons		
Comp A Part numbers vary by color	CLRXXXXX-050	5 Gal.
Comp B	FUB0100-050	5 Gal.

Environmental Conditions

For optimum coating performance product, substrate and ambient temperature should be between 68°F-77°F (20°C-25°C). To prevent condensation during application the surface temperature must be 5°F (3°C) or more above the dew point at all times.

Note: For use outside this range please contact your Endura Representative.

Specifications

Hardness	ASTM D3363	2H
Solvent Resistance	ASTM D4752	100 MEK Rubs; No Failure
Abrasion Resistance (1000 cycles CS-17)	ASTM D4060	36 mg loss
Impact Resistance	ASTM D2794	100 in. lbs; Direct & Reverse NO failure
Flexibility	ASTM D522	1/16 mandrel bend: NO failure
Service Temp	-40°F to 360°F	-40°C to 182°C

Safety Precautions

Please refer to all Safety Data Sheets (SDS) before using this product. SDS sheets can be found on our website at www.endurapaint.com.