

### 1 Product & Substrate Temperature




25°C (77°F)  
20°C (68°F)

20-25 °C (68-77 °F)\*



### 2 Product Preparation

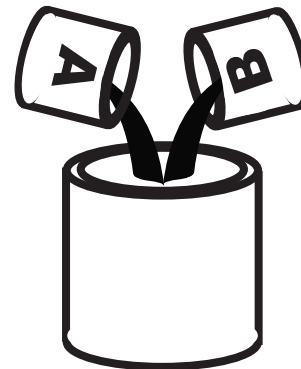

1 Gal Endura SlipStop CompC +  
1 Gal Endura EX-2C Comp A color +  
2 quarts of Endura SlipStop Comp B



### 3 Mixing



Paint must be thoroughly mixed.

### 4 Spraying Viscosity

**N/A**

12 seconds  
conventional ← → airless  
unreduced

Viscosity: 12 seconds using a  
Lemmer DIN 4 cup (blue)



### 5 Spray Gun Setup



| Feed Type          | Fluid Tip  | Application Pressure | Fluid Delivery |
|--------------------|------------|----------------------|----------------|
| Siphon Feed        | 1.6-1.8 mm | 40-50 psi            |                |
| Pressure Feed      | 1.0-1.4 mm | 50-60 psi            | 10-14 oz/min   |
| Air Assist Airless | 9-13 Thou  | 1000-1800 psi        |                |
| Airless            | 11-13 Thou | 1700-3000 psi        |                |

Product is applied using a roller



### 6 Application

Recommended Film Thickness



Coverage is approximately 60- 120 sq. ft. per 2.5-gallon kit